

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

Description

The RENOLIN CLP products are industrial gear oils of the latest generation, having outstanding extreme pressure characteristics (EP/AW properties) and an extremely high load carrying capacity. They are industrial gear oils with excellent demulsifying properties which can be used in all types of enclosed gear drives with circulation or splash lubrication systems. The RENOLIN CLP products offer extraordinary wear protection. They surpass the requirements in the standard FZG A/8.3/90 scuffing test as well as the more severe FZG test A/16.6/140 (double velocity - 16.6 m/s - and increased starting oil sump temperature - 140 °C). The RENOLIN CLP products offer an extremely high micropitting protection (load stage "high" in the load stage test as well as the endurance test). They offer excellent wear protection for roller bearings. The wear rates in the FAG FE8 test are extremely low under these extreme test conditions (7.5 rpm, 80 °C, 80 h, 80 kN).

Latest additive technology guarantees excellent wear protection and excellent corrosion protection (steel and copper-containing materials) The RENOLIN CLP products have good elastomer compatibility, stressed static and dynamic elastomers are lubricated and protected from wear. The lifetime of the components is increased. RENOLIN CLP oils can improve equipment reliability and increase productivity.

Advantages / Benefits

- **Excellent corrosion protection**
- **Low foaming, excellent air release**
- **Excellent demulsifying properties (water and water-containing fluids are separated fast)**
- **High oxidation resistance**
- **Extremely high load-carrying capacity, extreme pressure-, anti-wear performance**
- **Excellent bearing wear protection (under mixed friction conditions) – FE8**
- **Excellent protection from scuffing, excellent wear protection - FZG**
- **Excellent micropitting resistance in the load stage and endurance test**
- **High Brugger wear protection**
- **Excellent elastomer compatibility (static and dynamic)**
- **Good compatibility with paint materials**

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

Application

The RENOLIN CLP oils are recommended for industrial spur-, helical- and bevel enclosed gears with circulation or splash lubrication, operating at oil temperatures up to 100 °C and peaks above (up to 120 °C). The RENOLIN CLP oils can be used for all applications where lubricants of the CLP type according to DIN 51517-3 are recommended by the gear manufacturer. These products meet and in many cases exceed the new requirements of well-known gearbox and bearing manufacturers. The RENOLIN CLP oils are particularly suited for gear sets working under heavy load or shock load. They also can be used in non-gear applications including highly loaded, low-speed plain and rolling contact bearings. These mineral oil-based products are designed to provide high quality, latest additive technology of industrial gear oil formulation. They meet the latest industrial standards of well-known OEMs. RENOLIN CLP is approved by company Flender GmbH.

Specifications

The RENOLIN CLP oils meet and in many cases exceed the requirements:

- DIN 51517-3 (2011): CLP
- ISO 6743-6 and ISO 12925-1: CKC / CKD / CKSMP
- AGMA 9005/E02: EP
- AIST 224
- David Brown S1 53.101

The products of the RENOLIN CLP series are approved for example by:

- Flender GmbH, Bocholt, Germany, Flender BA 7300, table A
- Müller Weingarten AG, Germany DT 55 005, 10/2003

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

Typical technical data:

| Product name | RENOLIN CLP | | | | | |
|--|------------------------|-------|-------|-------|-------|-----------------|
| Properties | Unit | 68 | 100 | 150 | 220 | Test method |
| ISO VG | - | 68 | 100 | 150 | 220 | DIN 51519 |
| Kinematic Viscosity | | | | | | DIN EN ISO 3104 |
| at 40 °C | mm ² /s | 68 | 100 | 150 | 220 | |
| at 100 °C | mm ² /s | 8.7 | 11.2 | 14.5 | 18.9 | |
| Viscosity Index | - | 99 | 98 | 96 | 96 | DIN ISO 2909 |
| Density at 15 °C | kg/m ³ | 886 | 890 | 894 | 896 | DIN 51757 |
| Colour | ASTM | 1.0 | 1.5 | 3.0 | 3.5 | DIN ISO 2049 |
| Flashpoint | °C | > 230 | > 230 | > 230 | > 230 | DIN ISO 2592 |
| Pourpoint | °C | -24 | -21 | -24 | -24 | DIN ISO 3016 |
| Neutralization number | mgKOH/g | 0.6 | 0.6 | 0.6 | 0.6 | DIN 51558-1 |
| Demulsibility at 54 °C | min. | 10 | - | - | - | DIN ISO 6614 |
| Demulsibility at 82 °C | min. | - | 10 | 15 | 15 | DIN ISO 6614 |
| Copper corrosion 3 h, 100 °C (100 A3) | degree of corrosion | 1 | 1 | 1 | 1 | DIN EN ISO 2160 |
| Corrosion protection – steel procedure A: dist. water | degree of corrosion | 0 | 0 | 0 | 0 | DIN ISO 7120 |
| procedure B: sea water | degree of corrosion | 0 | 0 | 0 | 0 | |
| Foaming | | | | | | ASTM D 892 |
| Seq. I | ml | 0/0 | 0/0 | 0/0 | 0/0 | |
| Seq. II | ml | 0/0 | 0/0 | 0/0 | 0/0 | |
| Seq. III | ml | 0/0 | 0/0 | 0/0 | 0/0 | |

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

Typical technical data:

| Product name | RENOLIN CLP | | | | | |
|---|--------------------|----------|----------|----------|----------|---|
| Properties | Unit | 68 | 100 | 150 | 220 | Test method |
| FZG A/8.3/90 gear test rig Start temperature: 90 °C | failure load stage | > 12 | > 12 | > 12 | > 14 | DIN ISO 14635-1 |
| FZG A/16.6/140 gear test rig Start temperature: 140 °C | failure load stage | > 12 | > 12 | > 12 | > 12 | DIN ISO 14635-1 |
| FZG-GFT* test GT-C/8.3/90 Load stage test | GF Class | GFT high | GFT high | GFT high | GFT high | FVA-Information Sheet No. 54/I-IV |
| FZG-GFT* test GT-C/8.3/90 Endurance test | GF Class | GFT high | GFT high | GFT high | GFT high | FVA-Information Sheet No. 54/I-IV |
| FE8 wear test, D7.5/80-80 Roller wear | mg | < 5 | < 5 | < 5 | < 5 | DIN 51819-3 |
| Testing in mixed friction area according to Brugger | N/mm ² | ≥ 50 | ≥ 50 | ≥ 50 | ≥ 50 | DIN 51347-2 |
| Timken OK load | lbs | 85 | 95 | 95 | 95 | ASTM D 2782 |
| 4-Ball EP test | N | | | ≥ 2400 | | DIN 51350-2 |
| Weld load | kg | | | ≥ 250 | | ASTM D 2783-88 |
| Elastomer compatibility - dynamic and static: | | | | | | Fuchs Inhouse Test according to DIN ISO 1817 and according to Flender |
| • 72NBR902 (1000 h, 80 °C – dynamic) | | | | pass | | |
| • 75FPM585 (1000 h, 90 °C – dynamic) | | | | pass | | |
| • 75FKM17055 (1000 h, 90 °C – dynamic) | | | | pass | | |
| • SRE-NBR 28/SX according to DIN ISO 13226 (100 °C, 7 d – static) | | | | pass | | DIN ISO 1817 |

* GFT = Micropitting test (grey discoloration test)

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

Typical technical data:

| Product name | | RENOLIN CLP | | | |
|---|---------------------|-------------|------|------|-----------------|
| Properties | Unit | 320 | 460 | 680 | Test method |
| ISO VG | - | 320 | 460 | 680 | DIN 51519 |
| Kinematic Viscosity at 40 °C | mm ² /s | 320 | 460 | 680 | DIN EN ISO 3104 |
| at 100 °C | mm ² /s | 24 | 30.4 | 36.8 | |
| Viscosity Index | - | 95 | 95 | 88 | DIN ISO 2909 |
| Density at 15 °C | kg/m ³ | 900 | 901 | 918 | DIN 51757 |
| Colour | ASTM | 4.5 | 5.5 | 8.0 | DIN ISO 2049 |
| Flashpoint | °C | 255 | 270 | 270 | DIN ISO 2592 |
| Pourpoint | °C | -12 | -12 | -10 | DIN ISO 3016 |
| Neutralization number | mgKOH/g | 0.6 | 0.6 | 0.6 | DIN 51558-1 |
| Demulsibility at 54 °C | min. | - | - | - | DIN ISO 6614 |
| Demulsibility at 82 °C | min. | 20 | 25 | 30 | DIN ISO 6614 |
| Copper corrosion 3 h, 100 °C (100 A3) | degree of corrosion | 1 | 1 | 1 | DIN EN ISO 2160 |
| Corrosion protection – steel procedure A: dist. water | degree of corrosion | 0 | 0 | 0 | DIN ISO 7120 |
| procedure B: sea water | degree of corrosion | 0 | 0 | 0 | |
| Foaming | | | | | ASTM D 892 |
| Seq. I | ml | 0/0 | 0/0 | 0/0 | |
| Seq. II | ml | 0/0 | 0/0 | 0/0 | |
| Seq. III | ml | 0/0 | 0/0 | 0/0 | |

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity


Typical technical data:

| Product name | | RENOLIN CLP | | | |
|---|--------------------|-------------|----------|----------|---|
| Properties | Unit | 320 | 460 | 680 | Test method |
| FZG A/8.3/90 gear test rig Start temperature: 90 °C | failure load stage | > 14 | > 14 | > 14 | DIN ISO 14635-1 |
| FZG A/16.6/140 gear test rig Start temperature: 140 °C | failure load stage | > 12 | > 12 | > 12 | DIN ISO 14635-1 |
| FZG-GFT* test GT-C/8.3/90 Load stage test | GF Class | GFT high | GFT high | GFT high | FVA-Information Sheet No. 54/I-IV |
| FZG-GFT* test GT-C/8.3/90 Endurance test | GF Class | GFT high | GFT high | GFT high | FVA-Information Sheet No. 54/I-IV |
| FE8 wear test, D7.5/80-80, Roller wear | mg | < 5 | < 5 | < 5 | DIN 51819-3 |
| Testing in mixed friction area according to Brugger | N/mm ² | ≥ 50 | ≥ 50 | ≥ 50 | DIN 51347-2 |
| Timken OK load | lbs | 95 | 95 | 95 | ASTM D 2782 |
| 4-Ball EP test | N | | ≥ 2400 | | DIN 51350-2 |
| Weld load | kg | | ≥ 250 | | ASTM D 2783-88 |
| Elastomer compatibility - dynamic and static: | | | | | Fuchs Inhouse Test according to DIN ISO 1817 and according to Flender |
| • 72NBR902 (1000 h, 80 °C – dynamic) | | | pass | | |
| • 75FPM585 (1000 h, 90 °C – dynamic) | | | pass | | |
| • 75FKM17055 (1000 h, 90 °C – dynamic) | | | pass | | |
| • SRE-NBR 28/SX according to DIN ISO 13226 (100 °C, 7 d – static) | | | pass | | DIN ISO 1817 |

* GFT = Micropitting test (grey discoloration test)


RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

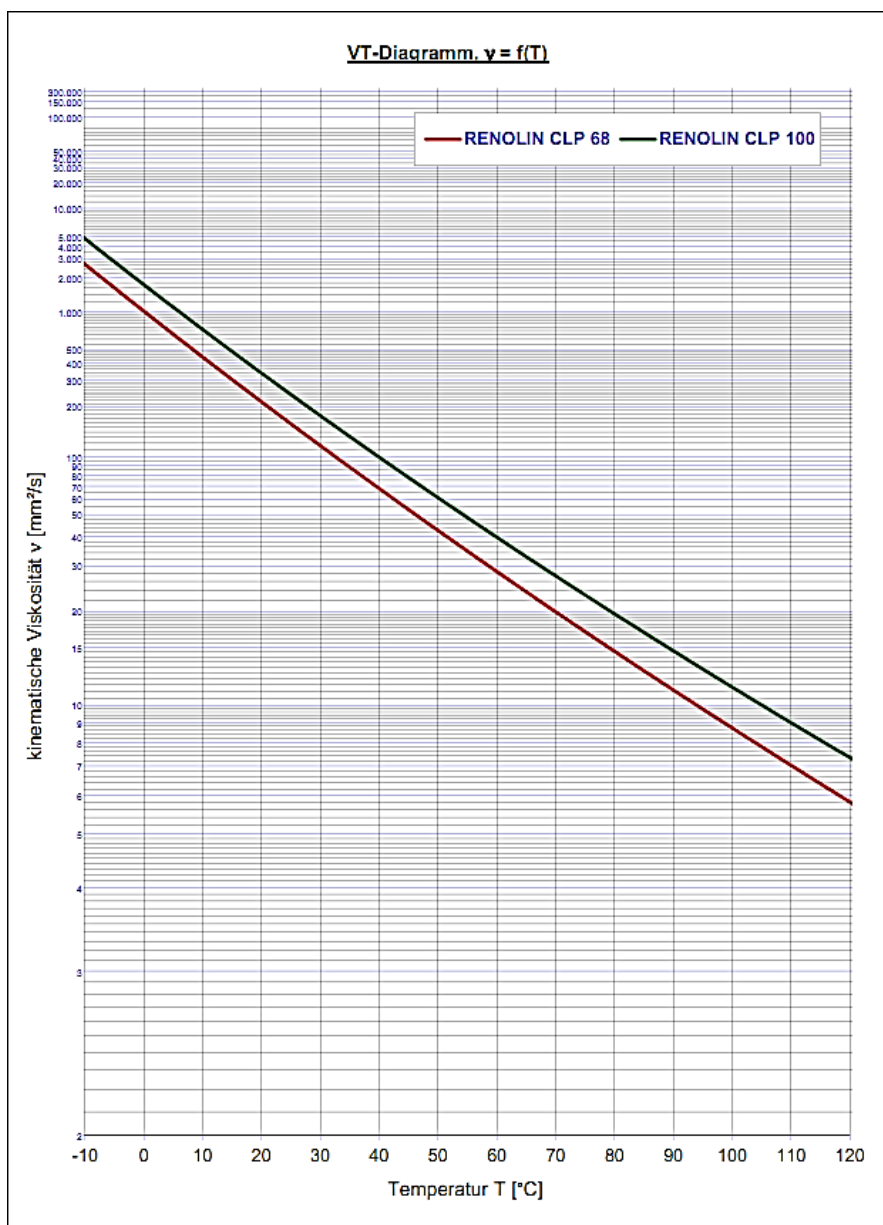


RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

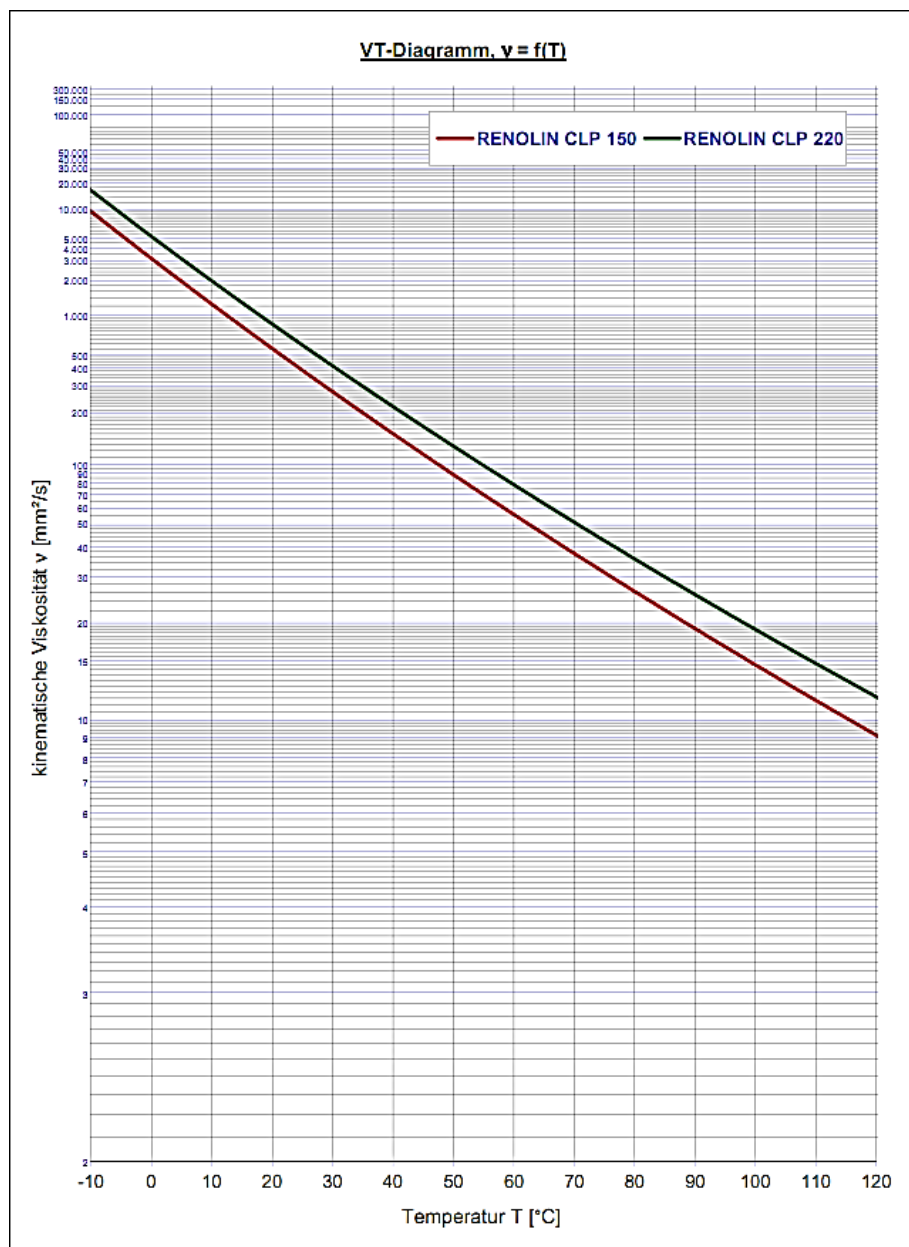


RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

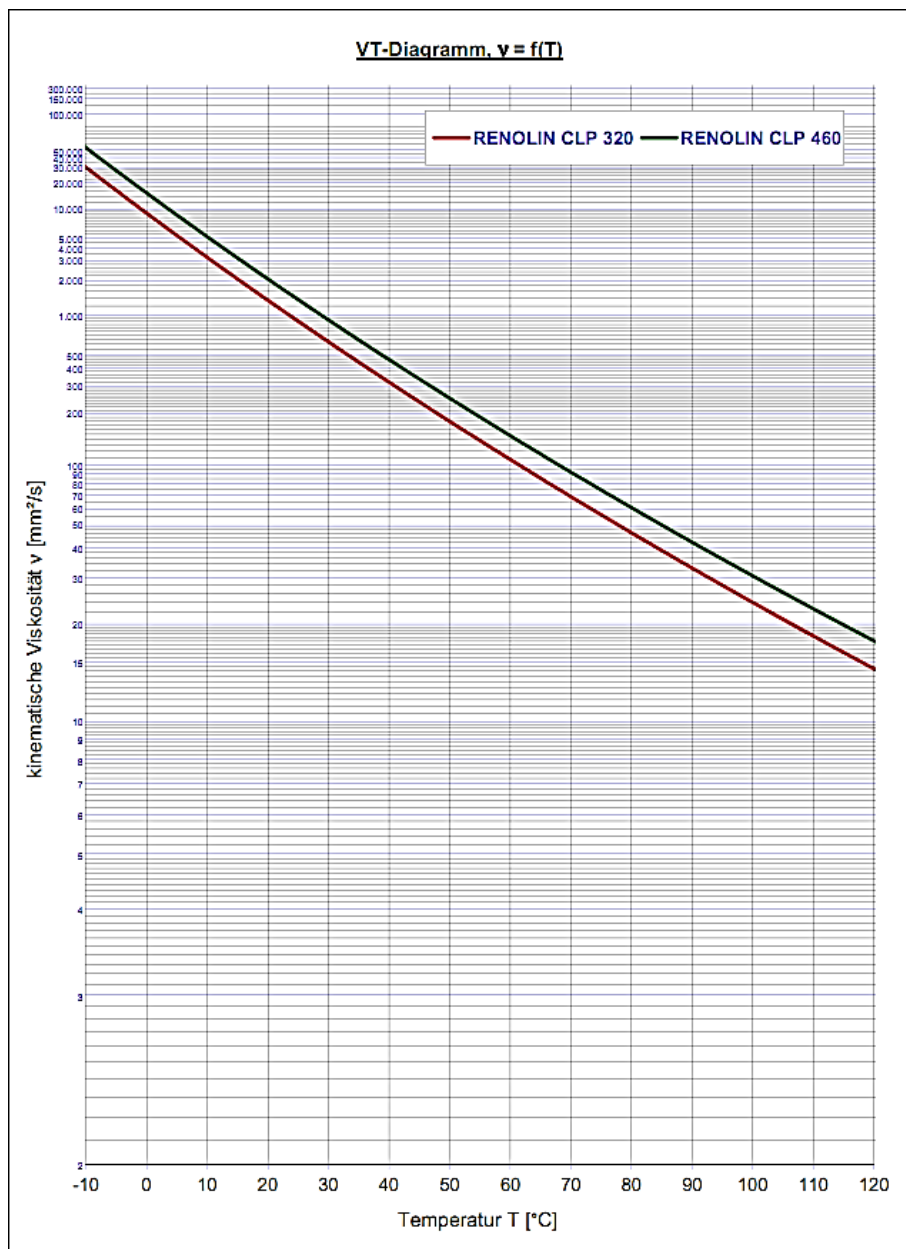

RENOLIN CLP

Heavy duty - EP - industrial gear oils of highest performance, outstanding extreme pressure characteristics and load carrying capacity

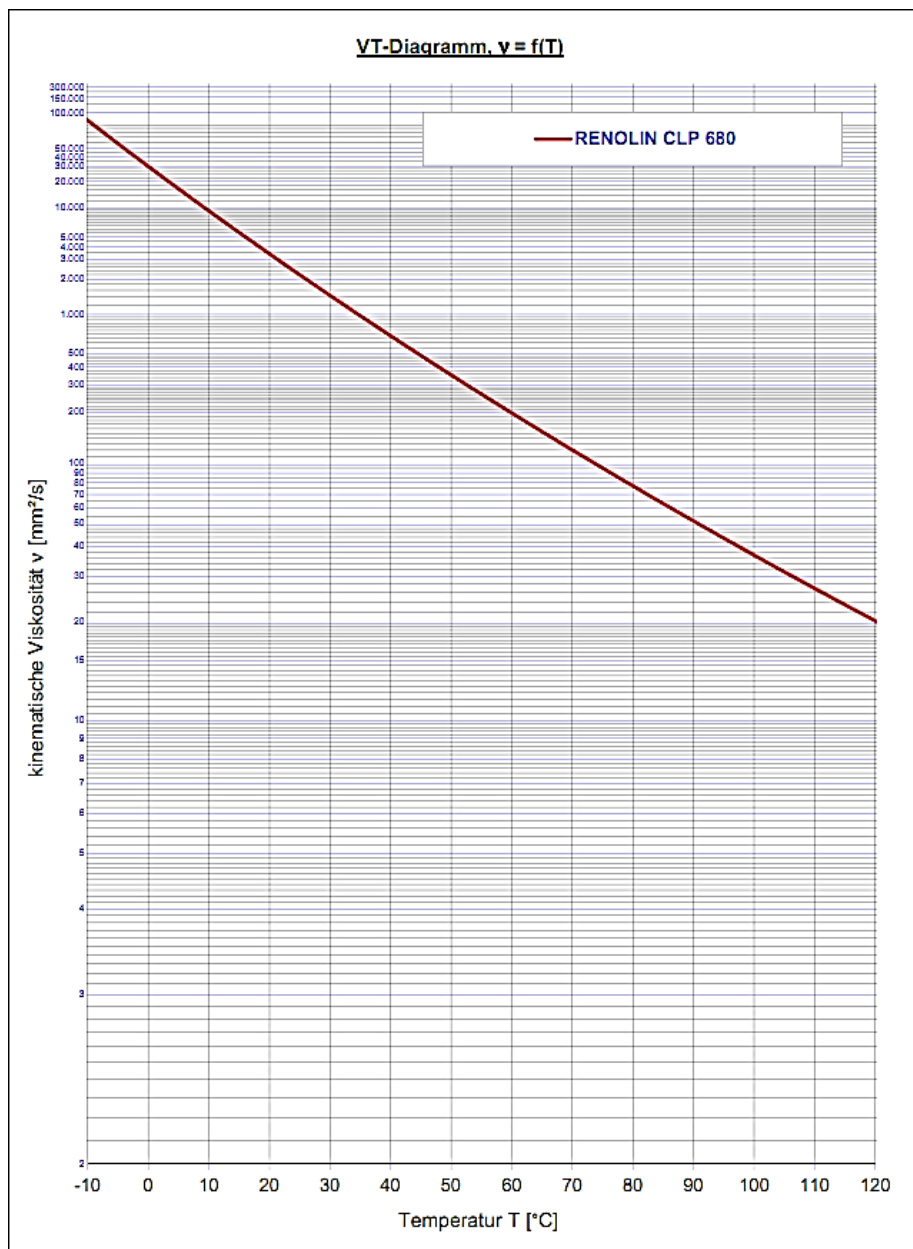

The information contained in this product information is based on the experience and know-how of FUCHS SCHMIERSTOFFE GMBH in the development and manufacturing of lubricants and represents the current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pre-treatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. Our products must not be used in aircrafts/spacecrafts or their components, unless such products are removed before the components are assembled into the aircraft/spacecraft. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS SCHMIERSTOFFE GMBH application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care.

Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

Any form of reproduction requires express prior written permission from FUCHS SCHMIERSTOFFE GMBH.

© FUCHS SCHMIERSTOFFE GMBH. All rights reserved.

Die Angaben in dieser Produktinformation beruhen auf den allgemeinen Erfahrungen und Kenntnissen der FUCHS SCHMIERSTOFFE GMBH in der Entwicklung und Herstellung von Schmierstoffen und entsprechen unserem heutigen Wissensstand. Die Wirkungsweise unserer Produkte ist von vielfältigen Faktoren abhängig, insbesondere vom konkreten Einsatzzweck, der Applikation der Produkte, den Betriebsbedingungen, der Bauteilvorbehandlung, eventuellem Schmutzanfall von außen, etc. Aus diesem Grund sind allgemeingültige Aussagen zur Funktion unserer Produkte nicht möglich. Unsere Produkte dürfen nicht in Flugzeugen oder Raumfahrzeugen verwendet werden. Zur Herstellung von Komponenten für Flugzeuge oder Raumfahrzeuge dürfen unsere Produkte verwendet werden, wenn sie vor der Montage in das Flugzeug oder Raumfahrzeug rückstandslos von den Komponenten entfernt werden. Die Angaben in dieser Produktinformation stellen allgemeine, nicht verbindliche Richtwerte dar. Keinesfalls beinhalten sie hingegen eine Zusicherung von Eigenschaften oder eine Garantie für die Eignung des Produkts für den Einzelfall.

Wir empfehlen daher, vor dem Einsatz unserer Produkte mit den Ansprechpartnern der FUCHS SCHMIERSTOFFE GMBH ein individuelles Beratungsgespräch über die Einsatzbedingungen in der Anwendung und die Leistungsmerkmale der Produkte zu führen. Dem Anwender obliegt es, die Produkte in der vorgesehenen Anwendung auf deren Funktionssicherheit zu testen und mit der gebotenen Sorgfalt einzusetzen.

Unsere Produkte werden kontinuierlich weiterentwickelt. Deshalb behalten wir uns das Recht vor, das Produktprogramm, die Produkte und deren Herstellungsprozesse sowie alle Angaben in dieser Produktinformation jederzeit und ohne Vorankündigung zu ändern, sofern keine kundenspezifischen Vereinbarungen existieren, die dem entgegenstehen. Alle früheren Veröffentlichungen verlieren mit Erscheinen dieser Produktinformation ihre Gültigkeit.

Vervielfältigungen jeder Art und Form bedürfen der vorherigen schriftlichen Genehmigung der FUCHS SCHMIERSTOFFE GMBH.

© FUCHS SCHMIERSTOFFE GMBH. Alle Rechte vorbehalten.